

CHANGE AFFECTING TENSIONING PULLEY 55282

TECHNICAL INFO NO. 1112

VEHICLE MANUFACTURER / MODELS:

Ford	Fiesta, Focus, Mondeo
Mazda	2
Volvo	C30, S40, V50

Year of manufacture: from 2005

APPLIES TO ENGINES:

1.25, 1.4, 1.6 16V

APPLIES TO PART NO.:

RUVILLE-No.	OE-No.
55282	Ford: 1376164, 5M5G-6K254-AB Mazda: C401-12-500 Volvo: 30750905

IS USED IN:

5528270	timing belt kit
55282701	water pump kit

IMPORTANT NOTE!

When installing the modified tensioning pulley, the enclosed fixing bolt M8x46 must be used. As the screw hole has changed, it is not permitted to use mixed components.

Note the specifications of the vehicle manufacturer!

As part of our continuous efforts to improve our products, modifications have been made to tensioning pulley 55282 and the associated fixing bolt.

This Technical Information sheet shows the visual features of the previous versions (Figure 1, top) and the new version (Figure 1, bottom).

During the transition period, we may have mixed stocks of the different types.

All three versions meet the technical specifications and can be used without restrictions on the specified vehicles.

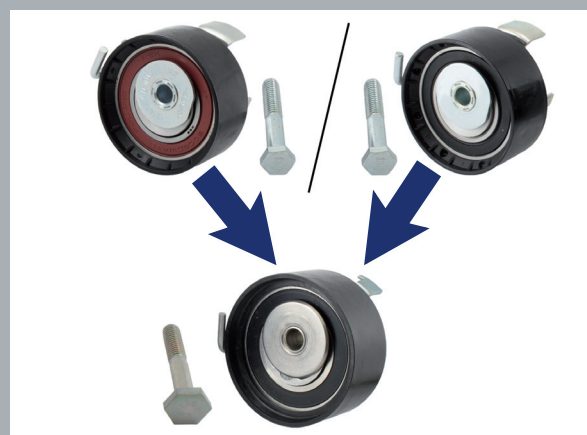


Image 1: Top: the two previous versions with red or black seal. Bottom: the new version



INFORMATION

Corresponding spare parts can be found in our online catalogue at www.ruville.de. Where reference is made to the spare parts numbers of the vehicle manufacturers, this is only for the purposes of comparison.